
High-speed, Flat-bed, Top & Bottom Cover Stitch Machine



## NW8803GMG

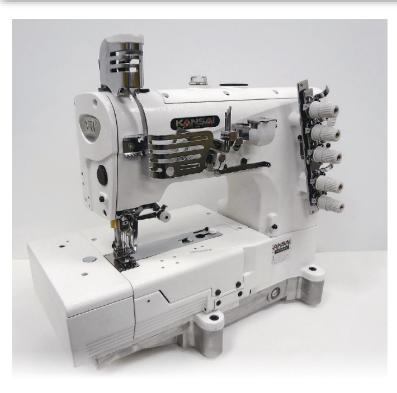

3 needles, flatbed, top and bottom cover stitch machine for multi purpose

- Plain seaming
- Hemming
- Tape binding

## Complimentary Conversion Kit





1. Tape binding for neck and sleeve



2. Hemming for bottom and sleeve





\*The conversion kit is included in the purchase


## Features



Double layered oil seal is applied in the needle bar and the presser foot. This new oil seals protect your garment from oil stains.




Micro adjustable looper holder With this new looper holder system, gauge adjustment become much easier.



Needle bar stroke can be changed with only a screwdriver. 31mm ⇔ 33mm

DLC coated needle bar ensures durability and reliability in high speed run, and prevents oil leakage.



State of the art lubrication mechanism circulates the oil to the needle bar link bearing. This mechanism reduces noise and vibration.
Left picture shows the flow of the oil while machine running.



Sliding thread take-up mechanism By pulling the lever, the looper thread take-up slides down toward the operator. This mechanism makes easy to thread and troubleshoot.

## **Specification**

Model	Application	Material	Organ Needle	No. of threads	Needle gauge (Inch)	Needle bar stroke (mm)	Stitch length (stitch/inch)	Diff. feed ratio	Presser foot lift (mm)	Maximum Speed (rpm)
	7	$\boldsymbol{\vartheta}$	1	Sesse	+   +		<b>→</b>    <b>→</b> inch	<u> </u>	<u> </u>	€ sp.m
NW8803GMG	Multi purpose	Light to medium	UY128GAS #9 ~ 14	5	7/32, 1/4	31 (31⇔33)	8~16 (1.6~3.2mm)	0.7~2	6	6000