


SQ7702FB/PF/AF/DD



2 needle, double chain stitch, feed-off the arm machine, with a differential feeding system, rubber rear puller, pneumatic presser system and direct drive motor.

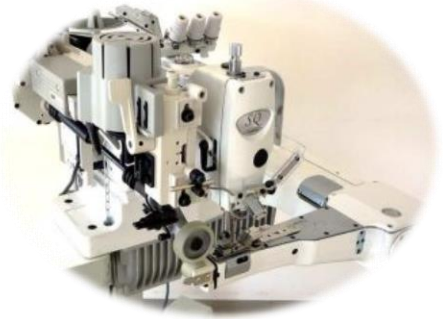

Pneumatic presser foot



DLC coated Needle bar and oil seal achieve high




Rear puller device



Push button stitch length adjustment



Differential feed mechanism prevents puckering

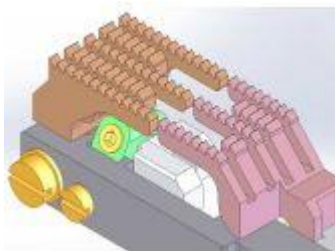

Full automatic lubrication with Oil filter



Direct motor



Model Name	Application	Material	Needle	No. of threads	Needle gauge	Needle bar stroke	Stitch length	Diff.Feed ratio	Presser foot lift	Maximum Speed
SQ7702FB/PF/AF/DD	Lap seam	Medium	UYx128GAS TVx3 #12	4	1/4" 3/16"	31.3mm	1.2-3.2mm 8-21/inch	0.7~1.3	10mm	5000

