


WFB5509PA-4WAC

Automatic waist banding machine

4 needle, cylinder bed, double chain stitch machine with needle feed mechanism for waist banding.

The needle feed amounts can be adjusted with the lower feed dog at the same time by push button.




Features



★ Original puller mechanism

Our own puller mechanism is used to drive the puller.

- Reliable fabric feeding and cutting achieved by independent front, rear, left and right pullers
- Revised drive mechanism reduces overrun

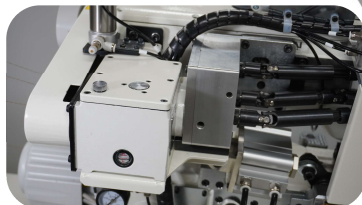


■ Auto skip stitch

The sensor detects the edge of fabric, then the machine automatically skip stitch and cut the fabric.



■ Touch screen

In addition to turning the automatic mode on and off, you can easily adjust belt cutting distance and other things.

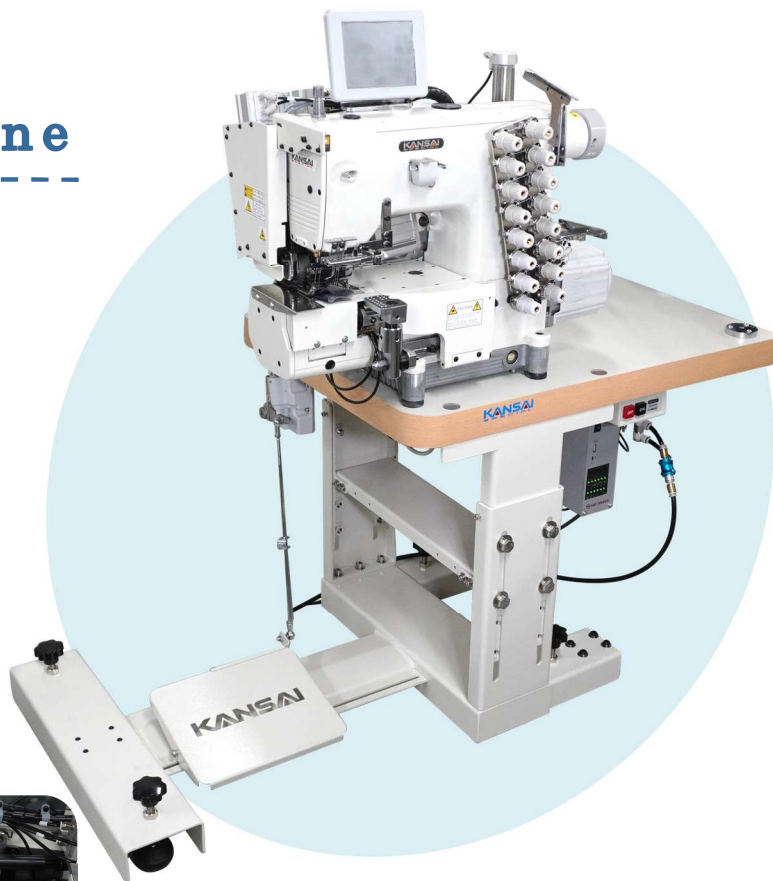

Small distance



The original gauge with a needle width of 1/8 allows for a variety of sewing styles.
Total 44.5 mm as max.

1/8-1/8-1/8-1/8-7/8-1/8-1/8-1/8

Specifications	WFB5509PA-4WAC
Max. Speed	3000 rpm
Needle Type	Organ DVx57 #21
Stitch Length	4~12 stitch/inch
Presser Foot Lift	9 mm
Needle Bar Stroke	32 mm
Diff. Feed Ratio	-
Gauge Size	1/8-1/8-1/8-1/8-7/8-1/8-1/8-1/8 inch
Application	Waist banding
Material	Heavy





WFB5509PA-4WAC

全自動 腰帯付け用


二重環縫いミシン

4本針、8本糸のシリンダーベッド、腰帯付け用二重環縫いミシンです。

針送りと送り歯がリンクしているため、ボタン操作のみで両方の送り量を同時に調整できます。

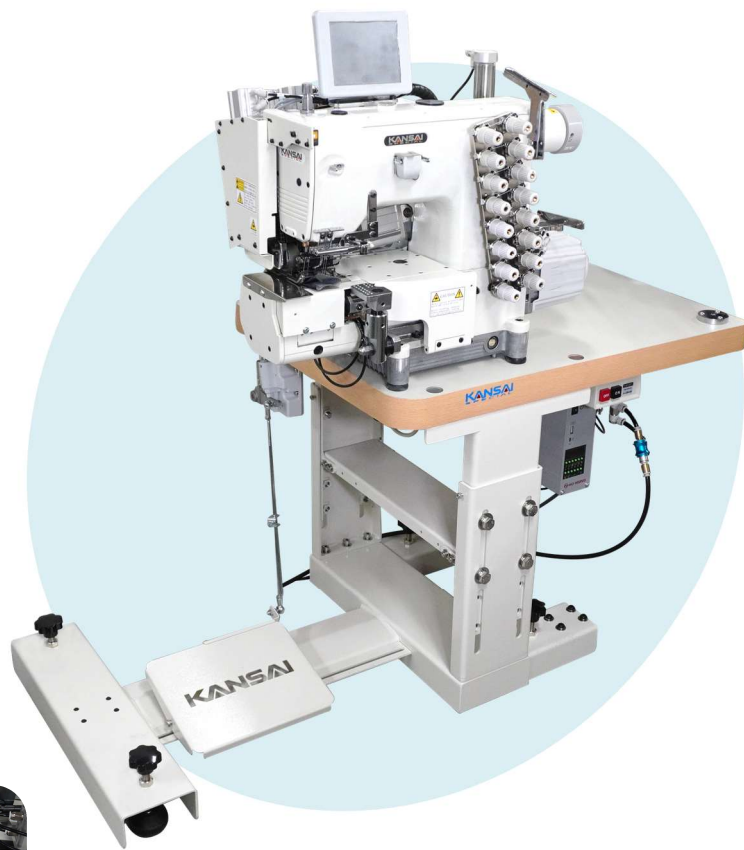

製品の特徴

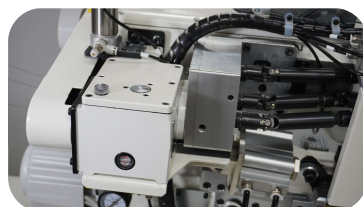

★ オリジナルプラー機構

プラーの駆動に自社プラー機構を採用。

- ・前後左右独立プーラによる確実な生地送り、カットを実現
- ・駆動機構の見直しによりオーバランの軽減



■ タッチパネル

自動モードのON/OFFに加え、目飛ばし、腰帯カットの距離などの調整を簡単に行えます。



■ 目飛ばし機構

センサーが生地端を自動で感知し、自動的に目飛ばしや生地カットをします。

小さな針幅



1/8の針幅を任意に変更することで、レディースや子供服の帯付けにも対応可能です。
総針幅：44.5 mm

1/8-1/8-1/8-1/8-7/8-1/8-1/8-1/8

仕様	WFB5509PA-4WAC
回転速度	3000 rpm
使用針	Organ DVx57 #21
縫い目長さ	4~12 Stitch/inch
押さえ上げ量	9 mm
針棒ストローク	32 mm
差動送り機構	-
ゲージ幅	1/8-1/8-1/8-1/8-7/8-1/8-1/8-1/8 inch
用途	腰帯付け
生地厚さ	厚物

