

Cylinder-bed, Top & Bottom Cover Stitch Machine

NR9803GCC-UTA



3-needles, cylinder-bed top & bottom cover stitch machine with pneumatic thread trimmer and presser foot lifter

Suitable for covering of overlock seam, and plain seam




Back<BOTTOM>



※The machine also comes with a complimentary conversion kit for center covering and hemming

Complimentary Conversion Kit

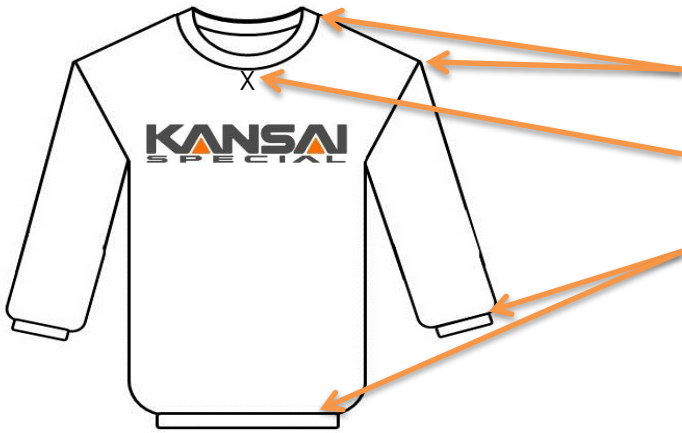

Covering: neck and shoulder(arm)



Plain seam: decorative stitch

Covering / Hemming: sleeve and bottom

Center covering		
Left covering		
Hemming		


Left covering	Center covering
Hemming	Hemming

Features

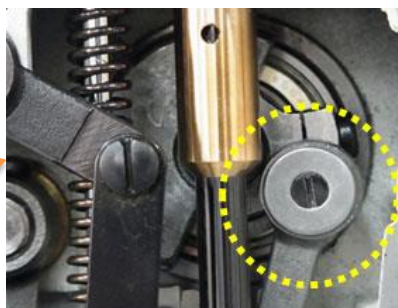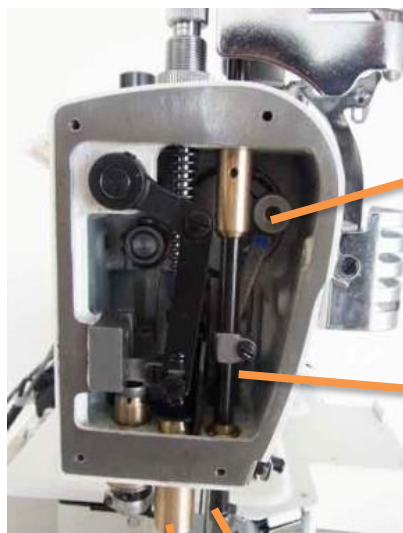


Needle bar stroke can be changed with only a screwdriver .
31mm ⇄ 33mm

DLC coated needle bar ensures durability and reliability in high speed run, and prevents oil leakage.

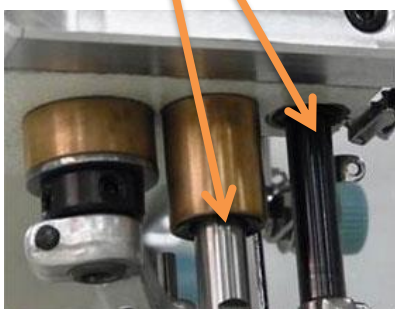

Double layered oil seal is applied in the needle bar and the presser foot. This new oil seals protect your garment from oil stains.

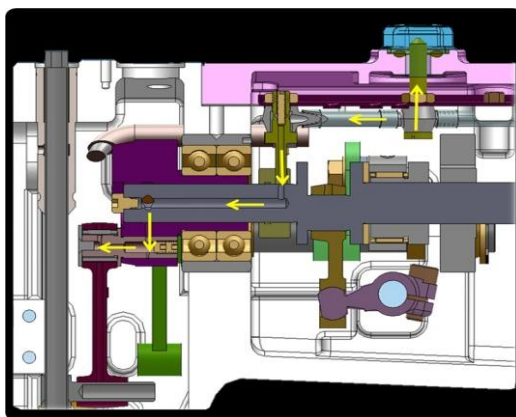











State of the art Lubrication mechanism circulates the oil to the needle bar link bearing. This mechanism can reduce noise and vibration. Above picture shows the flow of the oil while machine running.



Pneumatic presser foot lifter and thread cutter reduces the operator's stress and helps increasing in productivity

Specification

Model	Application	Material	Organ Needle	No. of threads	Needle gauge (Inch)	Needle bar stroke (mm)	Stitch length (stitch/inch)	Diff. feed ratio	Presser foot lift (mm)	Maximum Speed (rpm)
NR9803 GCC-UTA										
	Multi purpose	Light to medium	UY128GAS #9 ~ 14	5	7/32, 1/4	31 (31⇄33)	6~16 (1.6~4.2mm)	0.3~2.9	6	6000

